

Trooper® TL4


Typical System Setup

Peripherals

Seon System

Vehicle Electrical Interface

Supports Four Cameras




Alarm Switch



GPS Receiver *1



Diagnostic Button




Optional Accessories


Smart-Reach® Mobile (Wi-Fi)



LCD Monitor

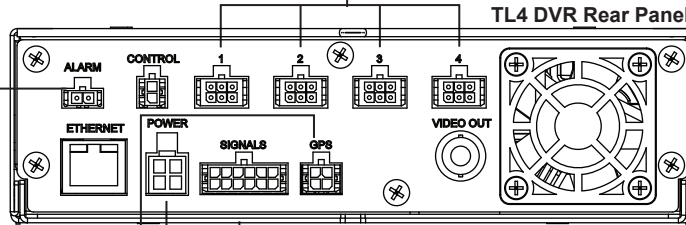

Adapter Harness *2



SPEED

- Red - Call Seon if using hall sensor
- Green - Speed sensor high
- Black - Speed sensor low

DIAGNOSTIC

- White
- Black
- Red
- Black

SIGNALS

- Left Turn (black)
- Stop (green)
- Brake Signal (red)
- Warning (brown)
- Right Turn (white)

POWER

- Vehicle Switched + 12V (yellow) 1A
- Battery Negative (black)
- Vehicle + 12V (red) 5A

*1 For speed tracking, use a GPS receiver or speed harness. For ease of installation and better speed tracking, Seon recommends using a GPS receiver.

*2 The Diagnostic Button and alarm input harness are optional and require the adapter harness.